


Instructions to Properly Make Wiring Connections Between an ISIMET Version 9.1 Utility Controller and a Honeywell Model E3SA Sensor with a Honeywell E3SCO Cartridge.

From the ISIMET Version 9.1 Controller, make connections from 24VAC and COM to J1 of the Honeywell CO Sensor.

From the Honeywell CO Sensor make connections from J5 Normally Open contacts to Terminal 1, screws 13 and 14 at the ISIMET Control Unit. Care should be taken to insure that JP3 on the circuit board has two (2) jumpers in place prior to making connection.

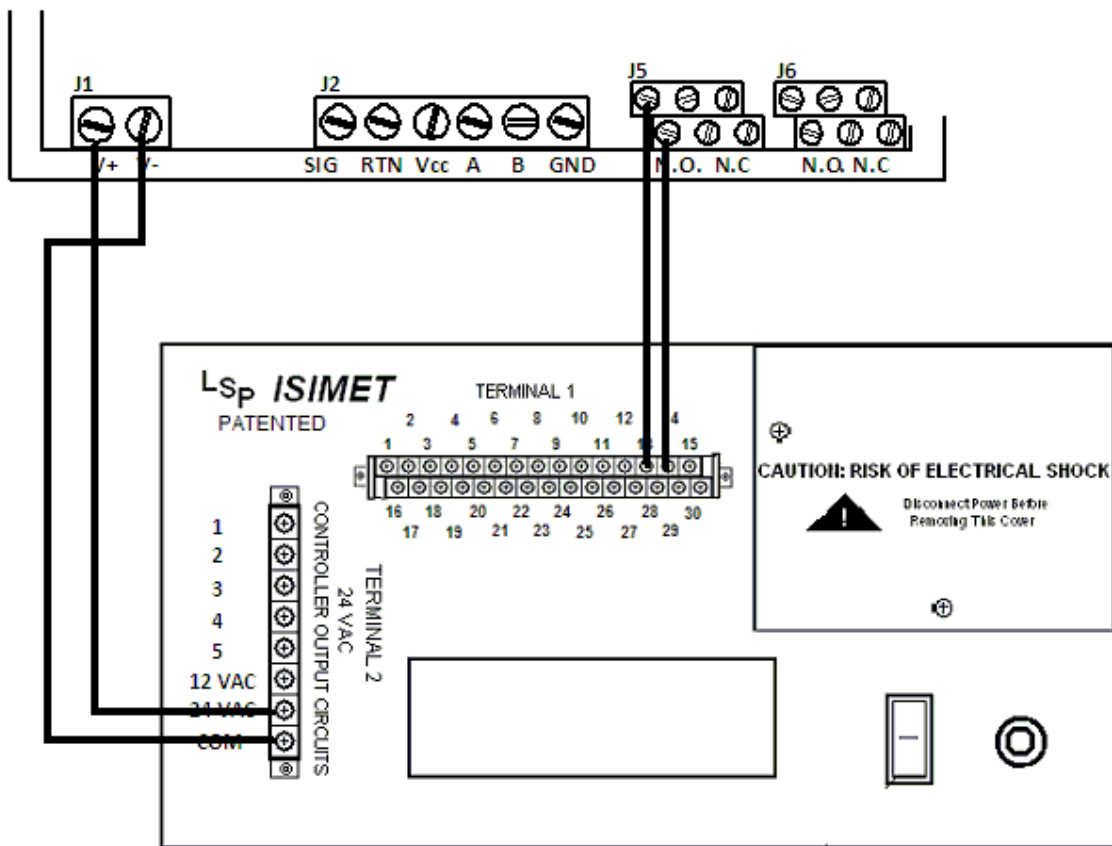

CAUTION: Do NOT run dry contact wiring from J1 & J5 in conduit with any voltage carrying wiring. Each voltage carrying wiring should be run in its own conduit.